


SCOPE: This specification applies to E/M buzzer TRIE-2341P


SPECIFICATIONS:

No.	Item	Unit	Specification	Condition
1	Rated voltage	VDC	12	
2	Operating Voltage	VDC	9 ~ 15	
3	Max rated current	mA	< 25	At rated voltage
4	Sound Pressure Level	dBA	75 Min	At rated voltage, 20cm
5	Operating frequency	Hz	400 +/- 100	
6	Max response time	ms	400	
7	Tone		Continuous	
8	Operating Temperature	C	-40 ~ +85	
9	Storage Temperature	C	-40 ~ +85	
10	Environmental		RoHS	
11	Weight	g	10	

DIMENSIONS:

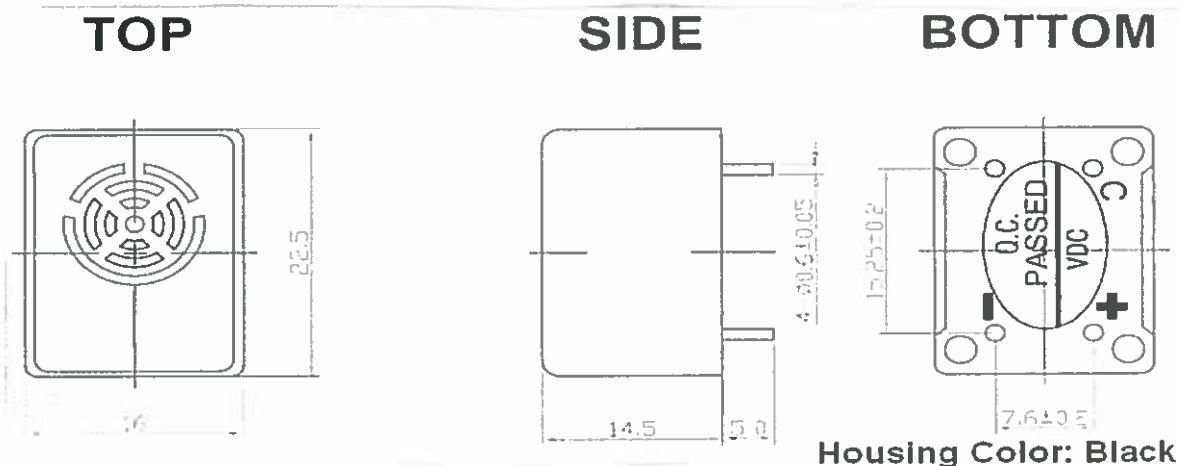

**Transducers USA
Confidential and Proprietary**

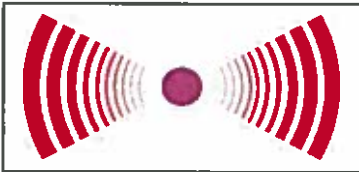

Transducers USA
 1400 Howard Street
 Elk Grove, IL 60007
 Toll Free: 888-921-6400 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number: TRIE-2341P	E/M Internal Buzzer
--	----------------------------

Date: 10/09/2009	THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERE TO. THIS DOES NOT APPLY TO VENDOR
-------------------------	---