


Specification			
Parameter	Value		Units
	TRIP-1500L(G)	TRIP-1500LB(G)	
Tone	Single Sweep	Six	
Rated Voltage	12		Vdc
Operating Voltage Range	6-15		Vdc
*Current (max.)	≤ 200		mA
*Sound Pressure Level @ 30 cm	110 (min.)		dB(A)
Sweep Frequency	1.5 to 4.0		KHz.
Operating Temp. Range	-20 to 60		$^{\circ}\text{C}$
Storage Temp. Range	-30 to 70		$^{\circ}\text{C}$

*Value applying rated voltage.

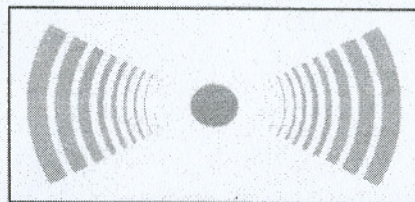

Transducers USA
 1400 Howard Street
 Elk Grove Village, IL 60007
 Toll Free: 800 956-1920 Fax: 847 956-1950
 www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:

TRIP-1500L Series

Title:

Piezo Siren

Date: 10/29/04

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR