
SCOPE: This specification applies to Piezo buzzer TRIP-2333P(G)


SPECIFICATIONS:

No.	ltem	Unit	Specification	Condition
1	Rated voltage	VDC	12	
2	Operating Voltage	VDC	3 ~ 20	
3	Max rated current	mA	<15	At rated voltage
4	Sound Pressure Level	dBA	88 Min	At rated voltage, 30cm
5	Resonant frequency	Hz	3300 +/- 500	
6	Tone		Continuous	
7	Operating Temperature	С	-20 ~ +70	
8	Storage Temperature	С	-30 ~ +85	
9	Environmental		RoHS	
10	Weight	6		

DIMENSIONS:

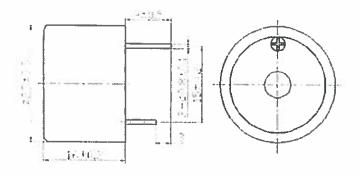

Transducers USA Confidential and Proprietary



Transducers USA
1400 Howard Street
Elk Grove, IL 60007
Toll Free: 888-921-6400 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number: TRIP-2333P(G)

Piezo Internal Buzzer

Date:

10/29/2004

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USESEWPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO THIS DOES NOT APPLY TO VENDOR.