
1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 100 CM	85	dBA
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE	5 – 28	Vdc
RESONANCE FREQUENCY	3,000 ± 500	Hz
*MAX CURRENT	18	mA
TONE	Continuous	-
OPERATING TEMPERATURE	-30 to +85	°C
STORAGE TEMPERATURE	-30 to +85	°C
HOUSING	ABS	-
WEIGHT	30	g


^{*}Value applying rated voltage

2. DIMENSIONS (unit in mm)

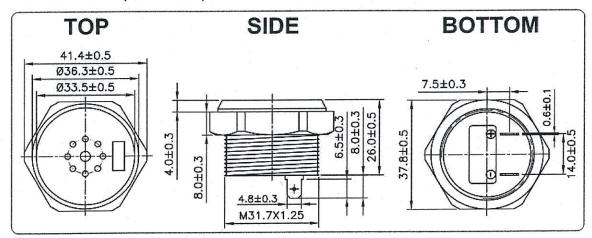

Tolerance: ±0.5mm except specified

Transducers USA Confidential and Proprietary



Transducers USA 1400 Howard Street

All dimensions are in MM unless otherwise specified

All differentiations are in with different appearance		
Drawing Number: TRIP-365	Piezo Audio Indicator	
Date:	THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA; INC. AND EXCEPT FOR USESEXPRESSLY GRANTED TO THE UNITED STATES	
03/10/2011	GOVERNMENT, TRANSDUCERS USA; INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR	