

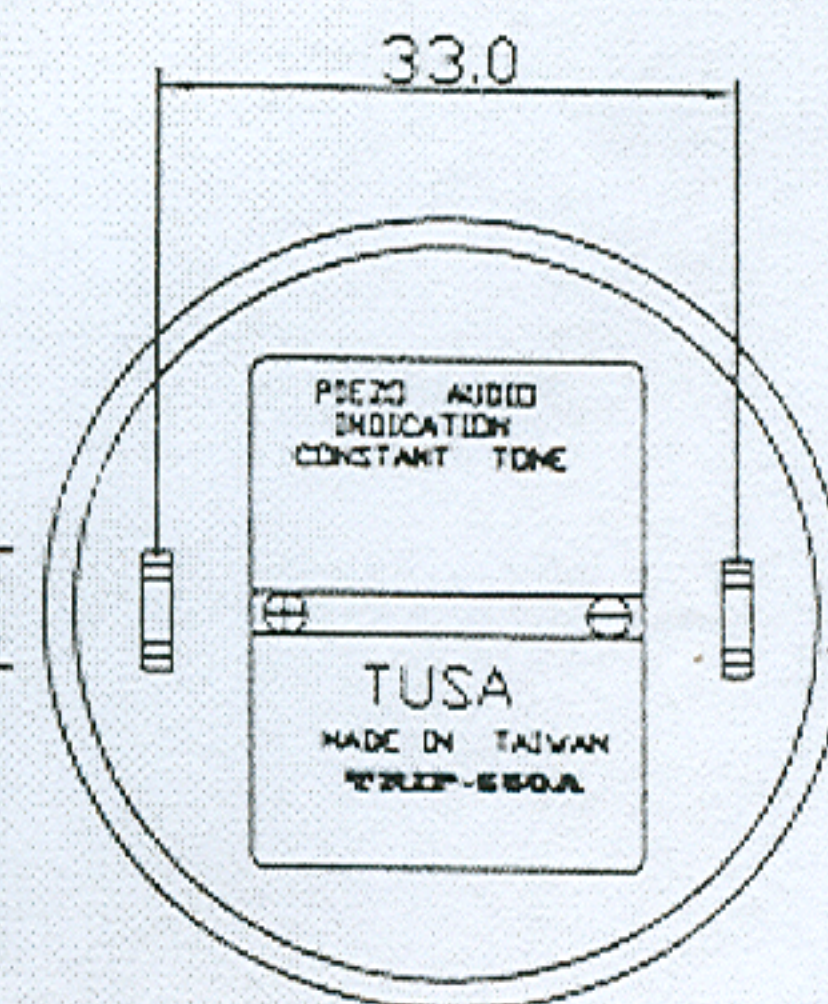
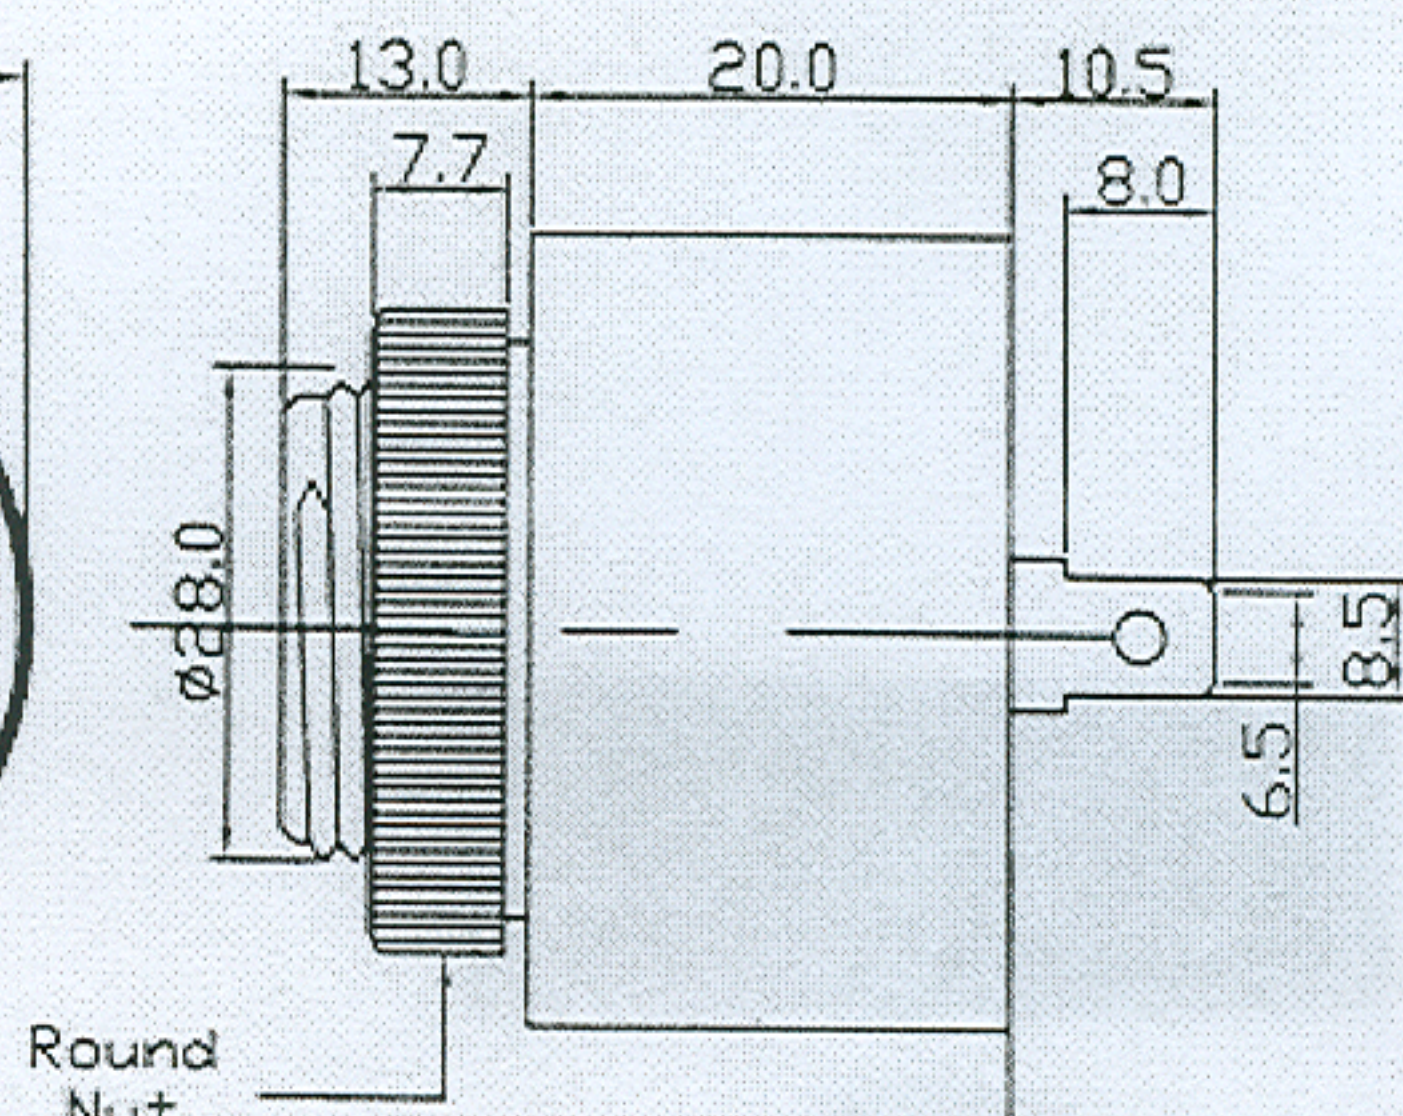
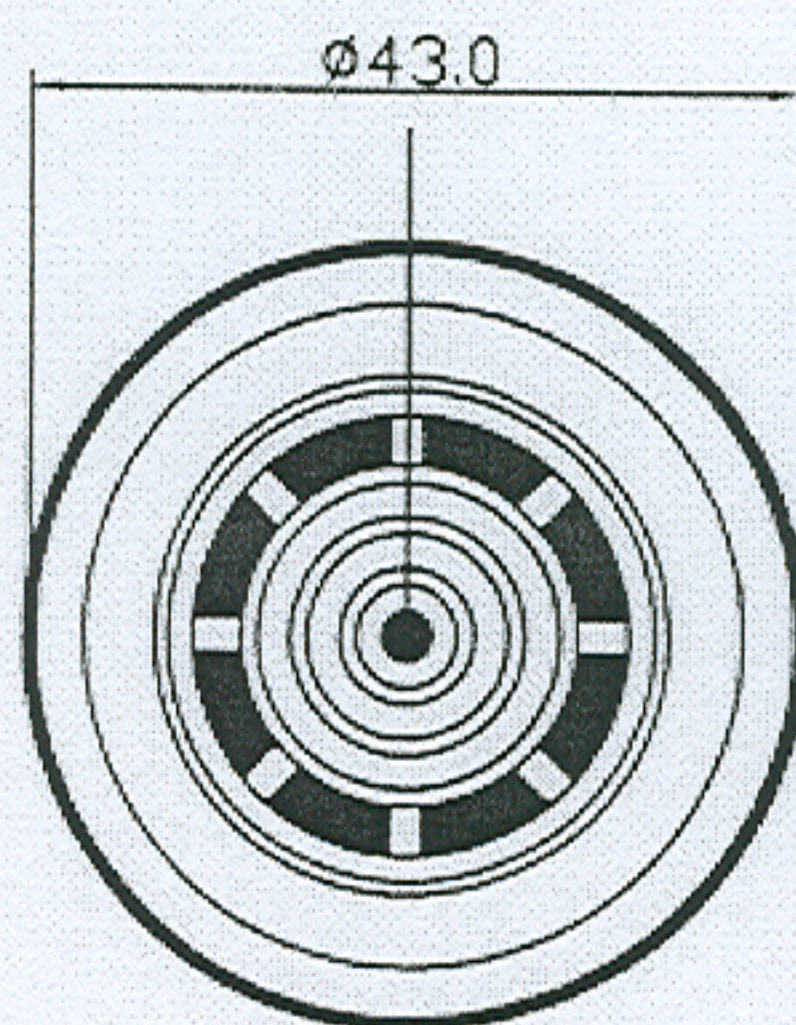


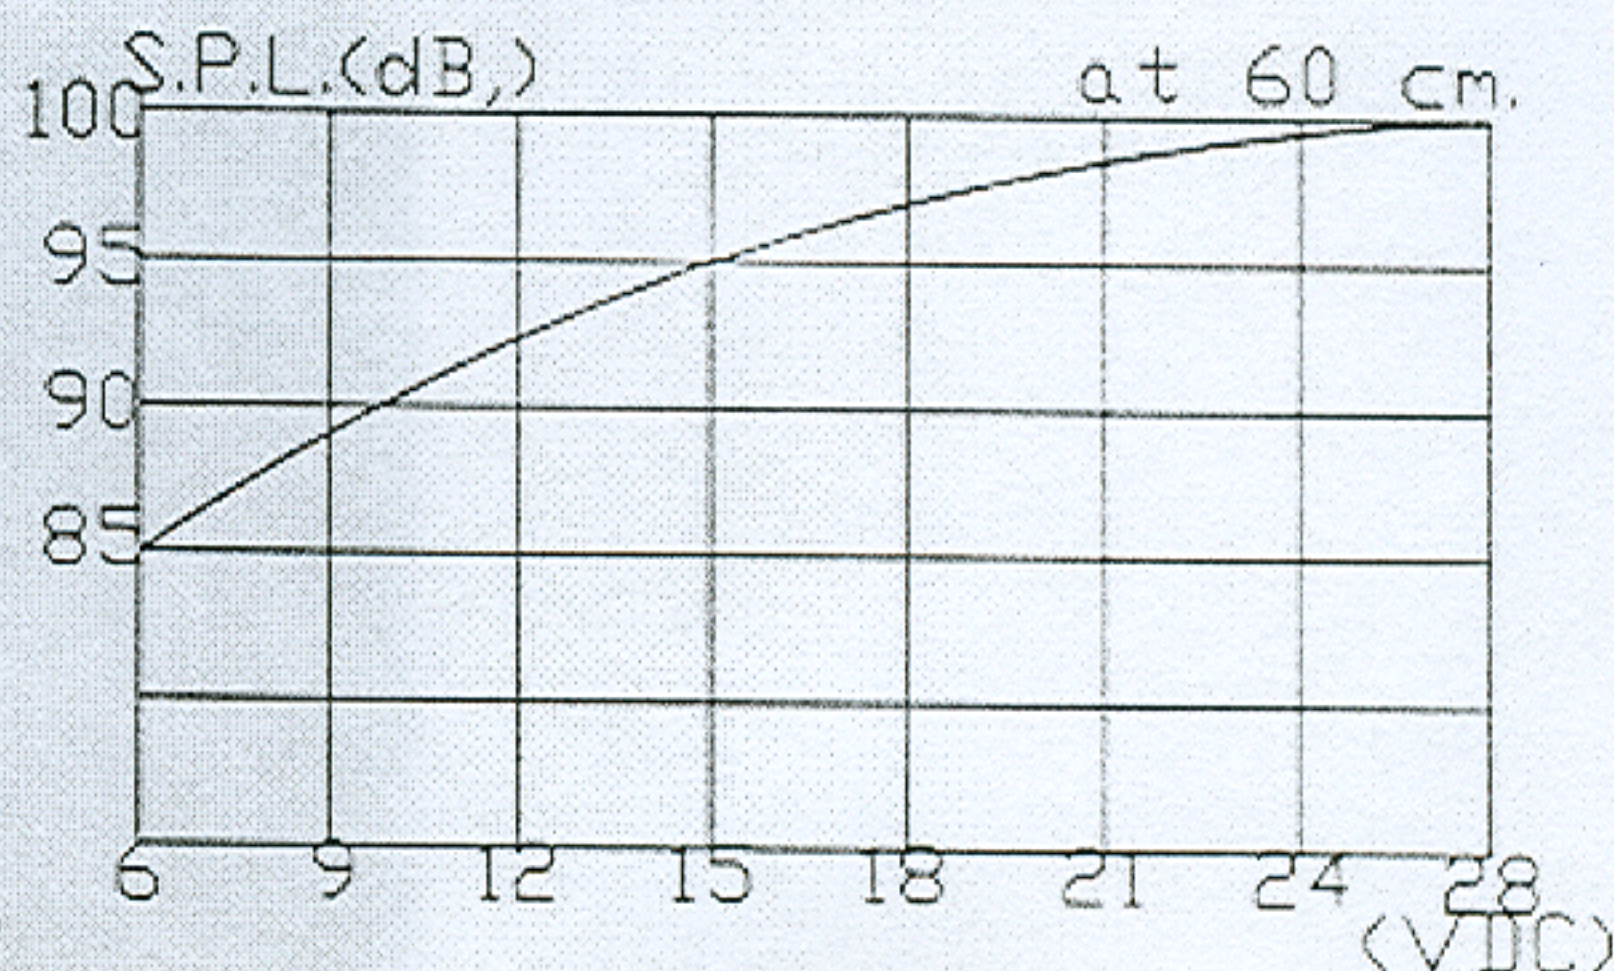

Unit:mm.
(mA.) Tolerance:±5%

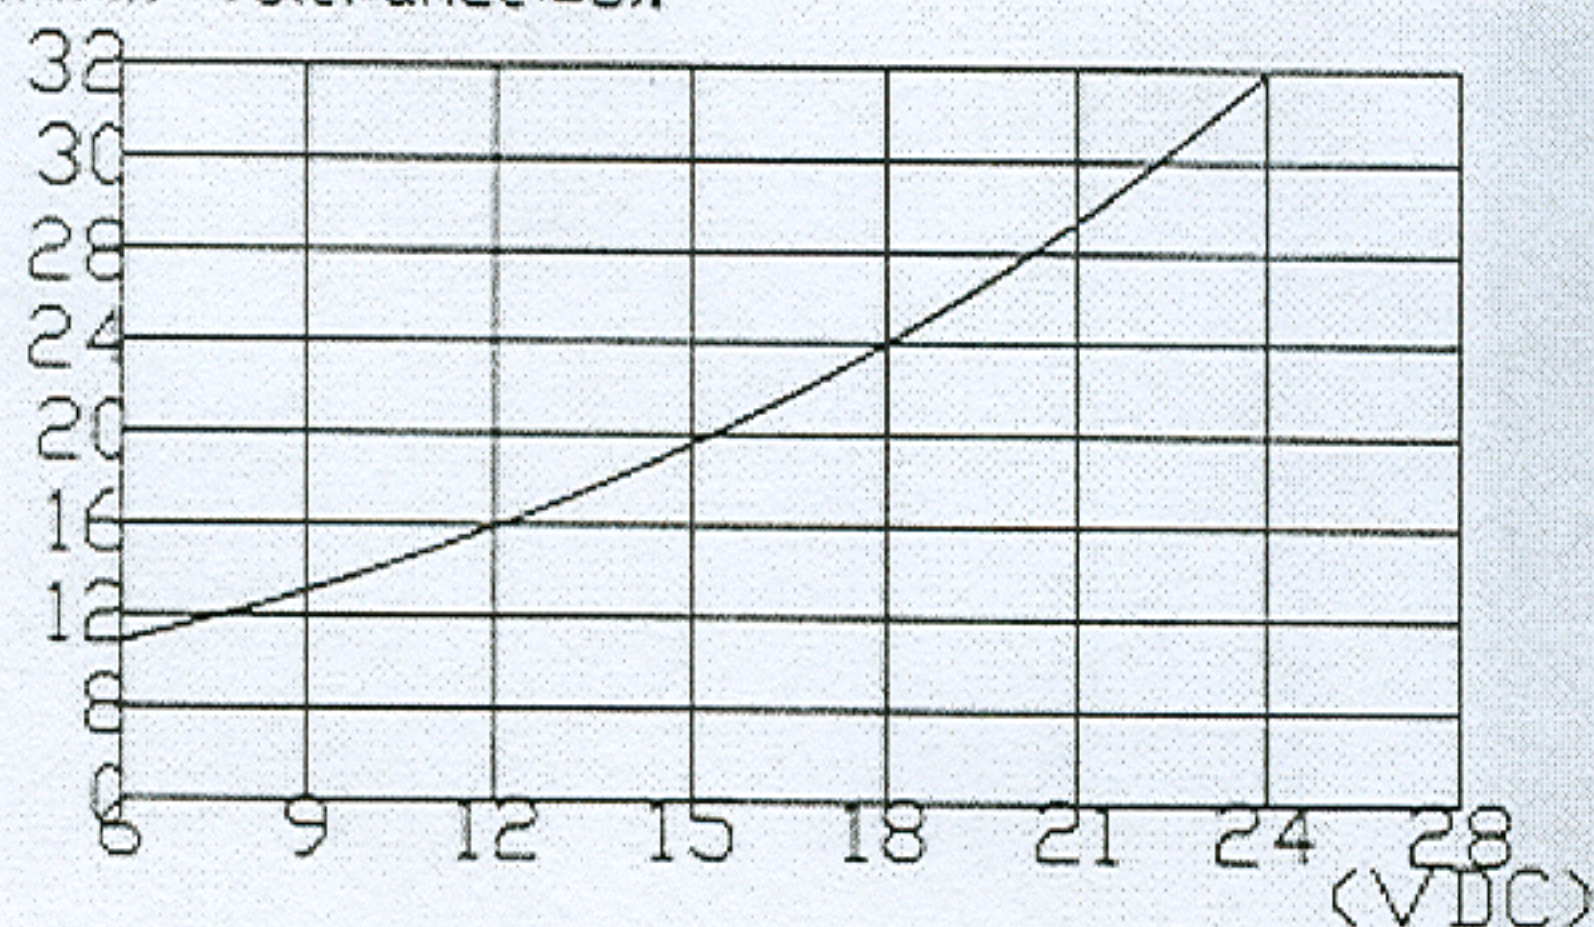


Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	16
Sound Pressure Level at 60cm/12VDC(dB.minimum)	92
Tone	Continuous
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	36

Transducers USA
Confidential &
Proprietary

Transducers USA

1400 Howard Street
Elk Grove Village, IL 60007
Toll Free: 800 956-1920 Fax: 847 956-1950
www.tusainc.com info@tusainc.com

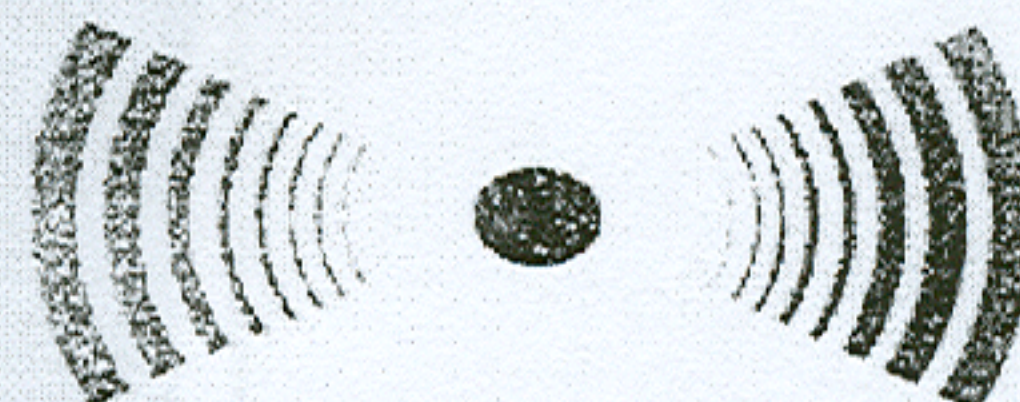

Drawing Number:
TRIP-650A

Title:
**PIEZO AUDIO INDICATOR
PANEL MOUNT**

Date: 11/9/05

All dimensions are in MM unless otherwise specified

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR PARTS