
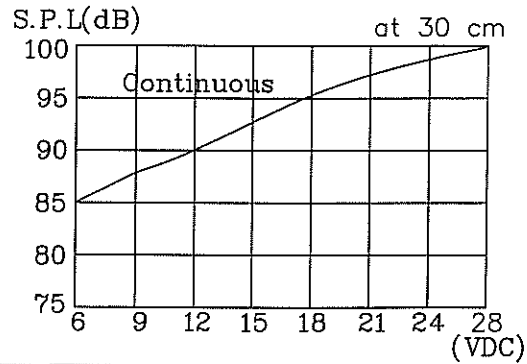



Gray Color of housing & nut.

Unit: mm Tolerance: ±0.5mm

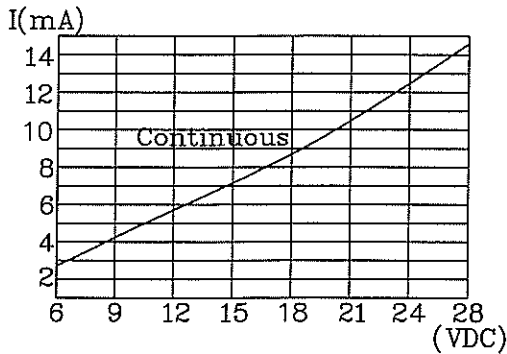

Oscillating Frequency (KHz)	3.6±0.5
Operating Voltage (VDC)	6~28
Current Consumption at 12 VDC (mA)	6
Sound Pressure Level at 12VDC/30cm (dB)	82
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	21.0

Transducers USA  
Confidential and Proprietary



Transducers USA  
1400 Howard Street  
Elk Grove, IL 60007  
Toll Free: 888-921-6400 FAX: 847-956-1950  
[www.tusainc.com](http://www.tusainc.com) [info@tusainc.com](mailto:info@tusainc.com)

All dimensions are in MM unless otherwise specified

Drawing Number:  
**TRIP-650S**

**Panel Mount DC Buzzer**

Date:

**4/23/2000**

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR