


SCOPE: This specification applies to Panel Mount Piezo Buzzer, **TRIP-650SA100**

1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 30 CM	100	dBA
RATED VOLTAGE	24	Vdc
OPERATING VOLTAGE	3 – 28	Vdc
RESONANCE FREQUENCY	2,900 ± 500	Hz
*MAX CURRENT	20	mA
tone	Continuous	-
OPERATING TEMPERATURE	-20 to +60	°C
STORAGE TEMPERATURE	-30 to +70	°C
HOUSING	ABS	-
TERMINAL	pins	-


*Value applying rated voltage

2. DIMENSIONS (unit in mm)

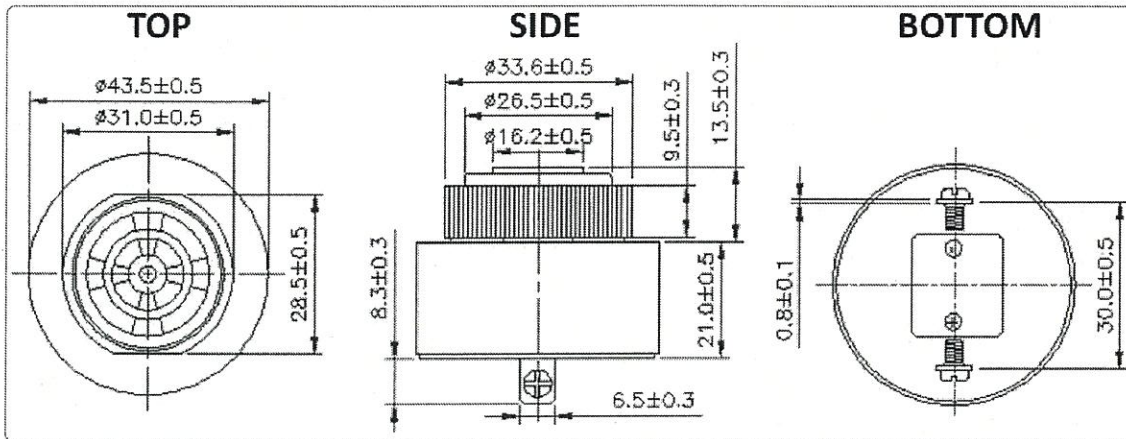

Tolerance: ±0.5mm except specified

Transducers USA
Confidential and Proprietary



Transducers USA
1400 Howard Street
Elk Grove, IL 60007
Toll Free: 800-956-1920 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:
TRIP-650SA100

Title:
Panel Mount Buzzer

Date:
03/18/2015

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR