
SCOPE This specification applies to Piezo Buzzer, TRIP-650SAN


SPECIFICATIONS:

No.	Item	Unit	Specification	Condition
1	Oscillating frequency	Hz	2900 +/- 500	
2	Operating voltage	AC / DC	6 ~ 28	
4	Sound pressure level	dB	92dB (28VDC) 75dB (6VDC)	@ 30cm
6	Tone		Continuous	
7	Operating Temp	С	-20 ~ +60	
8	Storage Temperature	С	-30 ~ +70	
9	Weight	g	33.8	
10	Environmental		RoHS	



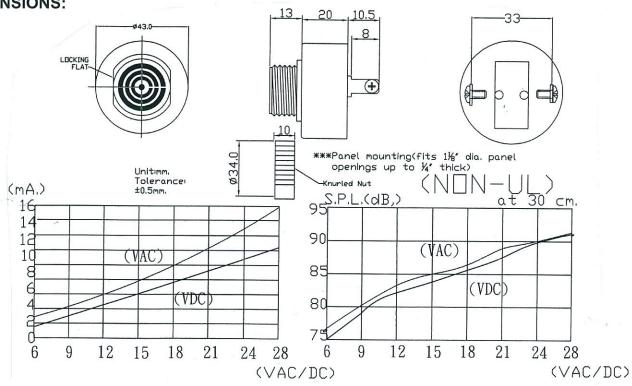

Transducers USA Confidential and Proprietary



Transducers USA

1400 Howard Street Elk Grove, IL 60007 Toll Free: 800-956-1920 FAX: 847-956-1950 www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number: Title: TRIP-650SAN Piezo Buzzer THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA: INC. AND EXCEPT FOR USESEXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA: INC. RESERVES ALL PATENT Date: 08/01/2012 PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO