



SPECIFICATION FOR Piezo Audio Indicator TRIP-80L-16G-ME


DIMENSION:

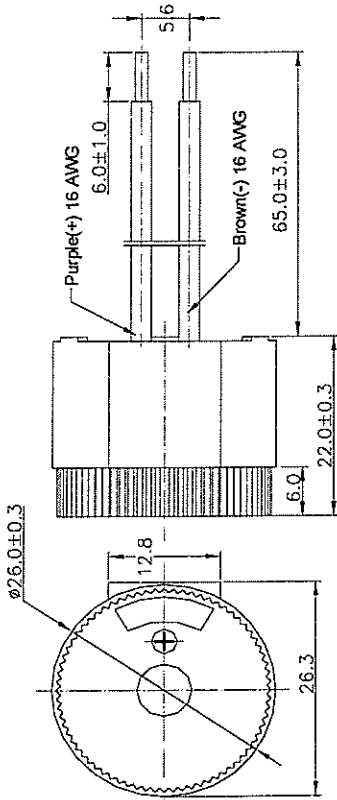

□ V-SPL, V-CURRENT CHARACTERISTICS

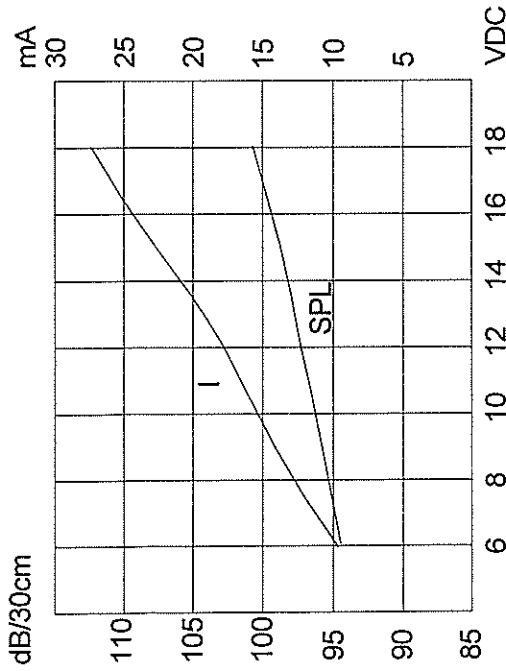

No.	Item	Unit	Specification
1	Operating Voltage	VDC	6 ~ 18
2	Rated Voltage	VDC	12
3	Current Consumption	mA	Max .25
4	Resonant Frequency	Hz	2700 +/- 500
5	Sound Pressure Operating Temperature	dB	Min 92 @ 30cm
6	Operating Temperature	C	-20 to +60
7	Storage Temperature	C	-30 to + 80
8	Material		ABS Gray
9	Terminal		Wire Leads
10	Environmental		RoHS



Transducers USA
 1400 Howard Street
 Elk Grove, IL 60007
 Toll Free: 888-921-6400 FAX: 847-956-1950
 www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:

TRIP-80L-16G-ME

Title:

PIEZO AUDIO INDICATOR

Date:

10/29/2009

Transducers USA
 Confidential and Proprietary

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR UNLAWFUL REPRODUCTION, NO PART OF THIS INFORMATION IS TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, TRADEMARK, AND OTHER RIGHTS. THIS DOCUMENT IS UNCLASSIFIED AND IS NOT SUBJECT TO EXPORT CONTROL REGULATIONS.