


SPECIFICATION

1. SCOPE .


This specification is applied to the piezo-element.

| | | |
|---------------------------|---|------------------------|
| 2. SPECIFICATION | | (at 25°C) |
| 2.1 Resonant Frequency | : | 8.0 ± 1.0 KHz |
| 2.2 Resonant Resistance | : | 500 Ω max |
| 2.3 Capacitance | : | 9000 pF ± 30% at 100Hz |
| 2.4 Input Voltage | : | 30 Vp-p max |
| 2.5 Operating Temperature | : | -20~+50°C |
| 2.6 Storage Temperature | : | -20~+70°C |
| 3. DIMENSION | : | as per figure |

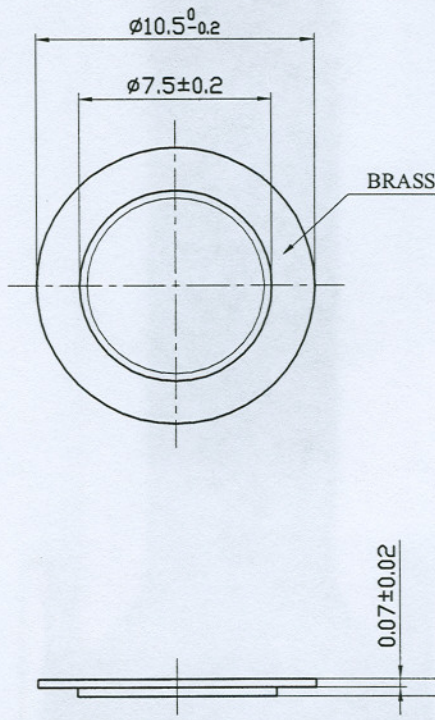

Transducers USA

1400 Howard Street
 Elk Grove Village, IL 60007
 Toll Free: 800 956-1920 Fax: 847 956-1950
 www.tusainc.com info@tusainc.com

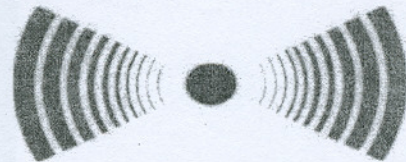

Drawing Number:
TRPB-1090

Title:
Piezo Bender

All dimensions are in MM unless otherwise specified

Date: 10/29/04

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR PARTS