
SCOPE: This specification appliers SMT Piezo buzzer TRSTP-2240


SPECIFICATIONS:

No.	ltem	Unit	Specification	Conditions
1	Rated Voltage	Vp-p	12	
2	Sound Pressure level	dB	90	12.0 Vp-p, 10cm, Square Wave 4000Hz
3	Capacitance	pF	19000 +/-30%	at 120Hz
4	Max input voltage	Vp-p	30	
5	Operating Temperature	С	-20 ~ +70	a 3
6	Terminal		SMD	
7	Housing		PPS	
8	Weight	g	2.8	

APPEARANCE DRAWING:

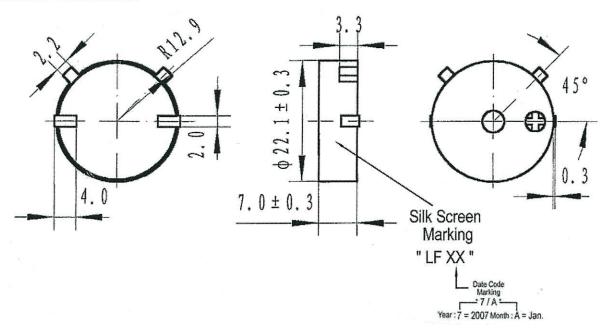

Transducers USA Confidential and Proprietary



Transducers USA

1400 Howard Street Elk Grove, IL 60007 Toll Free: 888-921-6400 FAX: 847-956-1950 info@tusainc.com www.tusainc.com

All dimensions are in MM unless otherwise specified

All ulmensions are	in wiw unless otherwise specified	
Drawing Number: TRSTP-2240	SMD Piezo Buzzer	
Date:	THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA; INC. AND EXCEPT FOR USESEXPRESSLY GRANTED TO THE UNITED STATES	
4/11/2009	GOVERNMENT, TRANSDUCERS USA; INC. RESERVES ALL PATE PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR	
	I 1	