


SPECIFICATION

1. Rated Voltage 5V
2. Operating Voltage 4~6V
3. Max. Rated Current 70mA
4. Coil Resistance $30 \pm 4.5 \Omega$
5. Coil Impedance 60Ω
6. Min. Sound Pressure Level 85dB/10cm
7. Resonant Frequency 2730Hz
8. Case Material PBT
9. Operating Temperature $-20 \sim +70^{\circ}\text{C}$
10. Store Temperature $-30 \sim +80^{\circ}\text{C}$
11. Weight 1g

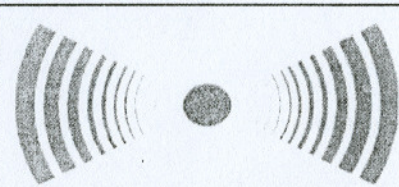

Transducers USA
 1400 Howard Street
 Elk Grove Village, IL 60007
 Toll Free: 800 956-1920 Fax: 847 956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:

TRTE-0951

Title:

TRANSDUCER-E/M

Date: 10/29/04

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR