


**SCOPE:** This specification applies to TRTE-1203P(G)42

**SPECIFICATIONS:**


TYPE		TRTE-1203P(G)42
Rated Voltage	(Vp-p)	3.5
Operating Voltage	(Vp-p)	3~5
Rated Current	(mA)	MAX.35
Coil Resistance	(Ω)	42±6
Sound Output at 10cm	(dBA)	MIN. 85
Resonant Frequency	(Hz)	2048
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	1.4

Applied voltage: rated voltage, 1/2 duty square wave.

**DIMENSIONS:**

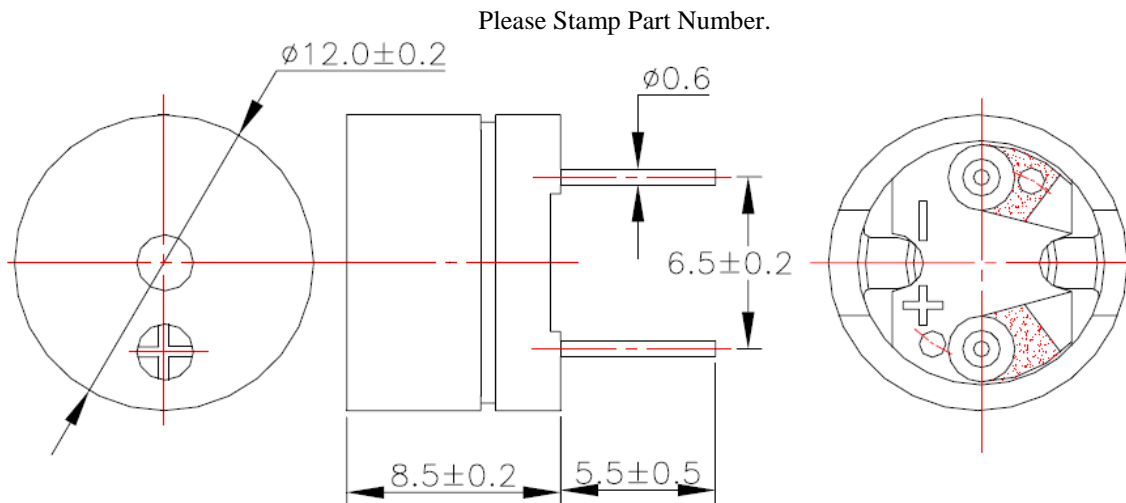

Transducers USA  
Confidential and Proprietary

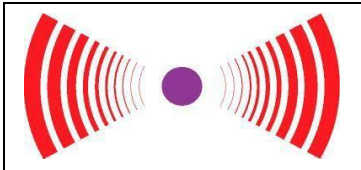

**Transducers USA**  
1400 Howard Street  
Elk Grove, IL 60007  
Toll Free: 888-921-6400 FAX: 847-956-1950  
[www.tusainc.com](http://www.tusainc.com) info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:  
TRTE-1203P(G)42

**Audio Transducer  
Electro-Mechanical**

Date:  
6/7/2017

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR