


SPECIFICATION; TRTP-1412S


Type	UNIT	TRTP-1405S	TRTP-1412S
*Min. Sound Output at 10cm	dB	80	85
Rated Voltage	Vp-p	5	12
Operating Voltage	Vp-p	1~30	1~30
Resonant Frequency	Hz	4000±500	4000±500
*Max. Current Consumption	mA	3	3
Operating Temperature	℃	-20 ~+80	
Storage Temperature	℃	-30 ~+85	
Weight	g	2	

Value applying rated voltage (DC)

Value applying(Min. operational DC voltage)

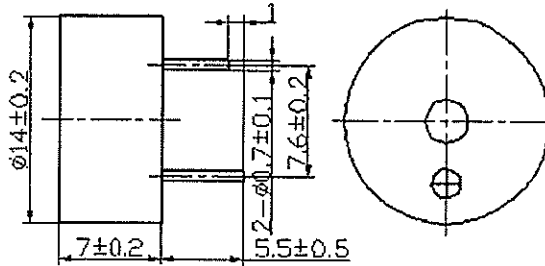

Transducers USA
Confidential &
Proprietary



Transducers USA
 1400 Howard Street
 Elk Grove, IL 60007
 Toll Free: 800-956-1920 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:
TRTP-1412S

Title:
PIEZO AUDIO INDICATOR

Date:
6/23/2004

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR