


**SCOPE:** This specification applies to TRTP-1740P-B


**SPECIFICATIONS:**

Type	UNIT	
*Min. Sound Output at 10cm	dB	85
Rated Voltage	Vp-p	12
Operating Voltage	Vp-p	1~30
Resonant Frequency	Hz	4000±500
*Max. Current Consumption	mA	2
Capacitance at 1,000HZ	pF	15000±30%
Case Material		PPO
Operating Temperature	℃	-20 ~+80
Storage Temperature	℃	-30~+100
Weight	g	1.3

\* Value applying at rated voltage

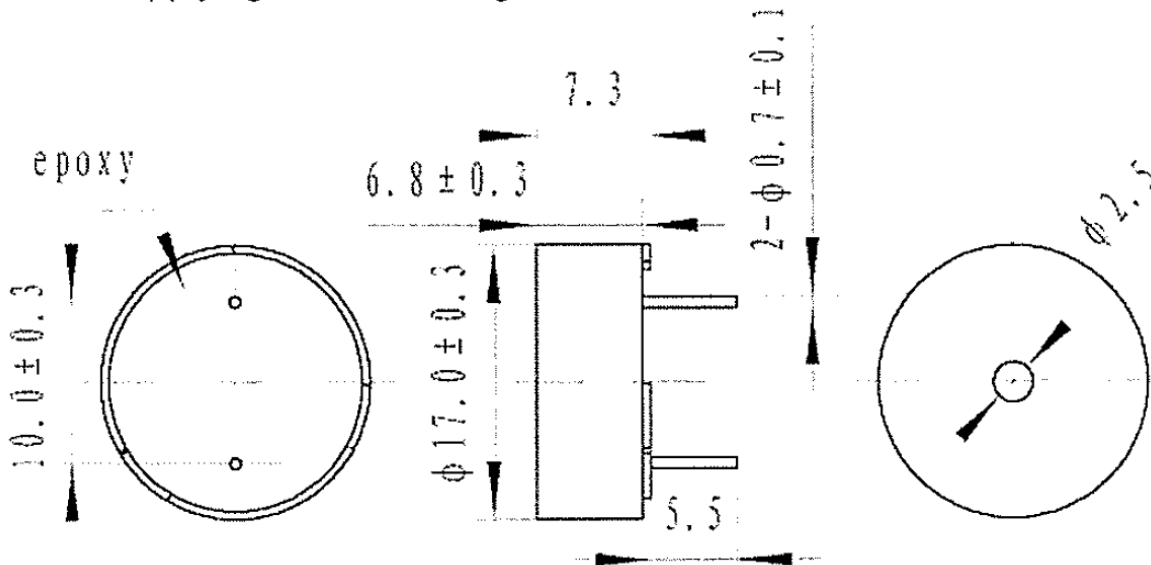

Transducers USA  
Confidential and Proprietary

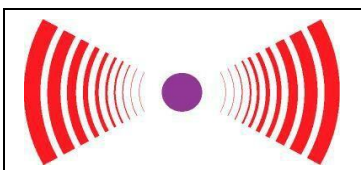

**Transducers USA**  
1400 Howard Street  
Elk Grove, IL 60007  
Toll Free: 888-921-6400 FAX: 847-956-1950  
[www.tusainc.com](http://www.tusainc.com) info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:  
TRTP-1740P-B

**Piezo Audio Indicator**

Date:  
8/22/2017

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR