



SPECIFICATION

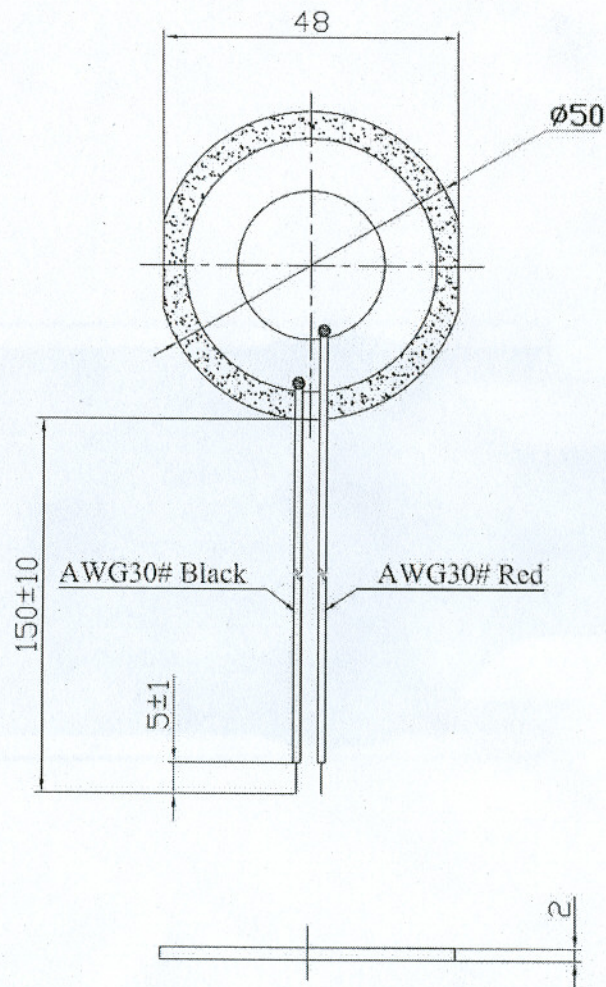

1. Rated Voltage.....12Vp-p Square Wave
2. Max. Allowable Voltage.....30Vp-p Square Wave
3. Max. Rated Current.....4mA at 1.0KHz/12Vp-p Square Wave
4. Min. Sound Pressure Level.....70dB at 1.0KHz/12Vp-p
.....Square Wave/10cm
5. Capacitance at 120Hz.....8000±30% pF
6. Resonant Frequency.....1.0±0.5KHz
7. Case Material.....ABS
8. Operating Temperature.....-20~+60°C
9. Store Temperature.....-30~+70°C
10. Weight.....4g

	<p>Transducers USA 1400 Howard Street Elk Grove Village, IL 60007 Toll Free: 800 956-1920 Fax: 847 956-1950 www.tusainc.com info@tusainc.com</p>
All dimensions are in MM unless otherwise specified	
Drawing Number: <div style="border: 1px solid black; padding: 2px; text-align: center; font-weight: bold;">TRTP-5010LB</div>	Title: <div style="border: 1px solid black; padding: 2px; text-align: center; font-weight: bold;">PIEZO TRANSDUCER</div>
Date: 10/29/04	THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR