


SPECIFICATION FOR E/M Transducer TRTE-0915P(G)

No.	Item	Unit	Specification
1	Rated Voltage	Vo-p	1.5
2	Operating voltage	Vo-p	1 ~ 2
3	Rated current	mA	Max 80
4	Sound Pressure level	dB	Min 85
5	Coil resistance	Ohm	5.5 +/-1
6	Resonant frequency	Hz	2731
7	Operating Temperature	C	-30 ~ +70
8	Storage temperature	C	-40 ~ +80
9	Housing		MPPPO
10	Weight	g	1
11	Terminal		Pin



CHARACTERISTICS:

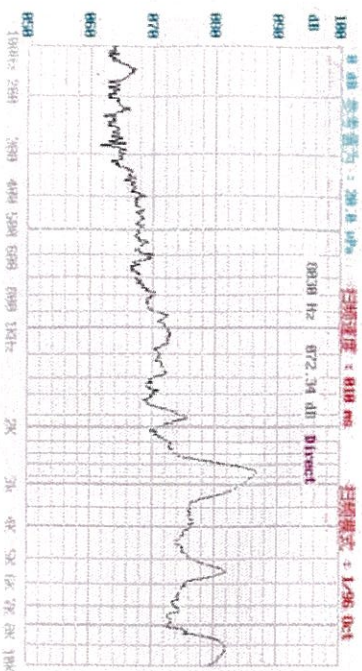

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS ROHS 2002/95/EC COMPLIANT.

DIMENSION:

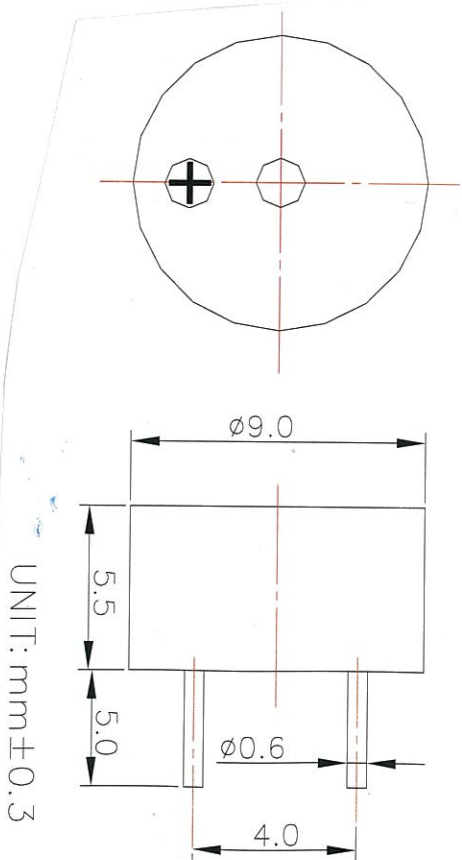

Transducers USA
 1400 Howard Street
 Elk Grove, IL 60007
 Toll Free: 888-921-6400 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:

TRTE-0915P(G)

Title:

E/M Transducer

Date:

05/06/2015

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, AND TRADEMARK RIGHTS. USE SALE MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS

Transducers USA
 Confidential and Proprietary